


- 1. Comax KLIK 25, effective width 495mm
- 2. Seam lock,  
wafer head screw 4,2x25 stainless steel fixing
- 3. Separation bitumous membrane
- 4. Plank decking, min. thickness 24mm
- 5. Breathable membrane
- 6. Counter-batten 40x60mm
- 7. Counter-batten sealing tape
- 8. Rafter
- 9. Thermal insulation
- 10. Vapour barrier
- 11. Plasterboard soffit

NOTES:

When designing the roof structure, please consider building physics (heat transfer, ventilation, sound insulation)  
 Timber structures has to be designed according to statics requirements  
 Its strongly recomended to use suitable separation layer(e.g. Bauder TOP40 NSK)

2 close-up:

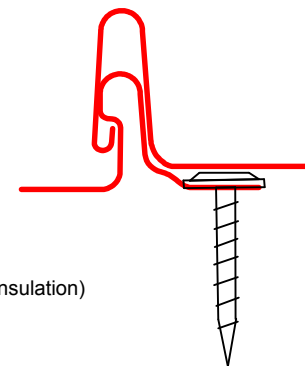

Drawing name

**COMAX KLIK WARM ROOF**

Scale:

1:5

Drawing number

Format:

A4

Version:

I. - 06/2019